



DIN

index

previous view

D2-29

data sheet

DIFLINE

D2

PTFE LINED PIPES - CERTIFIED - 2014/68/EU (PED)

Standard Supply

Design:

DIN 2848/2874

Flange: 1 fixed + 1 free

Range:

DN 15 - DN 600, PN 10

Version A:

body: P235GH EN 10216-217

flange: P245GH EN 1092-1

stub-end: P235GH EN 10 273

Interior lining:

← PTFE

Variants

Design:

Flange: 2 free

Length: up to 6 m


Metallic parts:

Stainless Steel 304L/316L

Low temp. steel P275NL

Interior lining:

← Antistatic PTFE

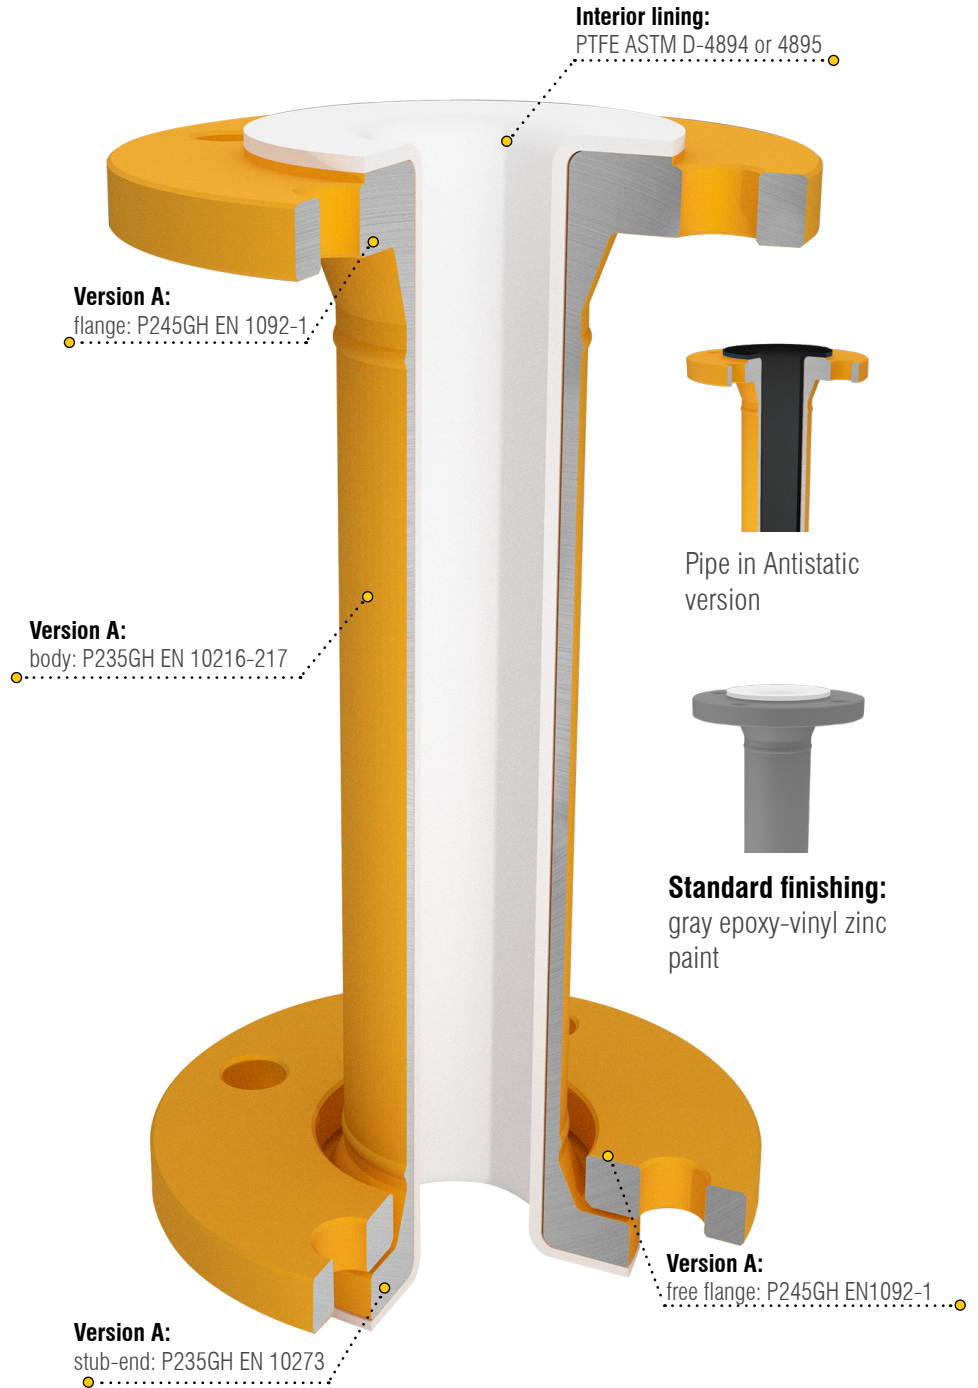

Available on request



Approvals and Certifications



Quality and Special tests



Engineering Services



Special Supply




Stainless steel 304L/316L components



External Finiture

PTFE LINED PIPES - CERTIFIED - 2014/68/EU (PED)

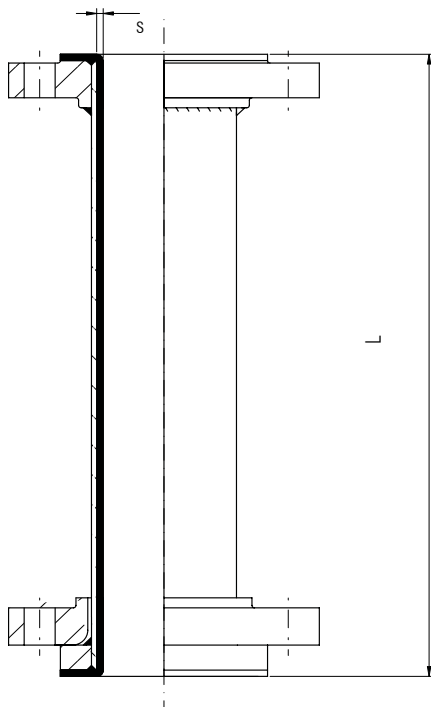

Dimensional table

DN	L min. mm	L max. mm	s mm	Weight pipe kg/m	Weight 2 flange
15	100	3000	3	1,2	1,5
20	100	3000	3	1,6	2
25	100	3000	3	2,5	2,5
32	100	3000	3,5	3,4	3,6
40	100	3000	3,5	4,5	4,2
50	100	3000	4	5,8	5,5
65	120	3000	4,5	7,1	6,6
80	120	3000	5	10	8,3
100	120	3000	5,5	14	9,9
125	120	3000	5,5	17,5	13,2
150	150	3000	6	23,5	16
200	150	3000	6,5	39	23
250	150	3000	7	55,5	31
300	200	3000	7	74	39
350	200	3000	7	85	52
400	200	3000	7	102	67
450	200	3000	7	130	85

Technical specifications of Difline products



Pipes and Flanges dimensions according to DIN



Fittings dimensions according to DIN 2848



Operative Conditions



Bolt Torque



Finiture, Marking, Packing



Table of Chemical Resistance of Materials*