

□ AISI 316L BS 4825 SANITARY CLAMP RETAINER PFA LINED DIFLON E2

The fitting is used in pharmaceutical and food industries to connect hoses quickly and safely to equipments and plants to equipments and plants in quickly way.


Standard construction material is AISI 316L/PFA.

The inner lining ensures resistance against nearly all chemicals, pH 0÷14, design temperature -40 °C ÷ 200 °C.

The fitting is laser marked with material, lot/casting, DN and brand.




Antistatic version

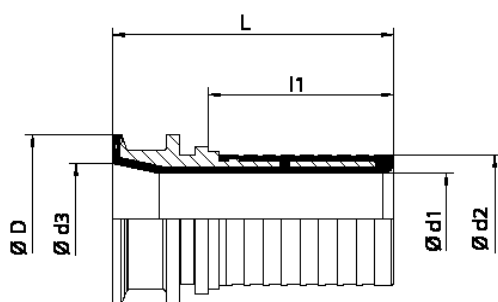

RECOMMENDED GASKET

DIFLEX BS 4825 clamp gasket, resistant to all acids and chemicals, pharmaceuticals and food products with temperatures from -170 °C to +270 °C and pressures up to 50 bar.

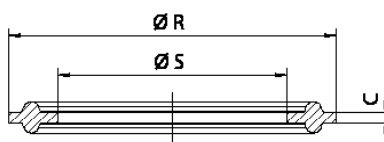

DN	L	l1	Ø D	Ø d1	Ø d2	Ø d3
25 - 1"	69	46	50,5	16,5	25,7	19,8
40 - 1 1/2"	76	60	50,5	27	38,5	34
50 - 2"	93	64	63,9	38,5	50,8	44

GASKET CLAMP BS 4825

DN	C	Ø R	Ø S
25 - 1"	1,7	50,5	22,1
40 - 1 1/2"	1,7	64	47,4
50 - 2"	1,7	77,5	60,5