

GASKETS FOR CAM & GROOVE FITTINGS

Application examples

In specific design DIFLEX gasket for CAM & GROOVE fittings .



Applications

Acids, Strong alkali, Solvents, Catalyzers, Aromatics, Foods, Pharmaceuticals, Chemicals, Petrochemicals, etc.

- . Operating temperature: -150° +260° C
- . Working pressure at room temperature: 80 bar
- . P×T: 12.000 (bar x C°) - pH: 0 ÷ 14

Purity of product for Diflex gaskets

DIFLEX can be used, without contra-indications, in the production of basic commodities

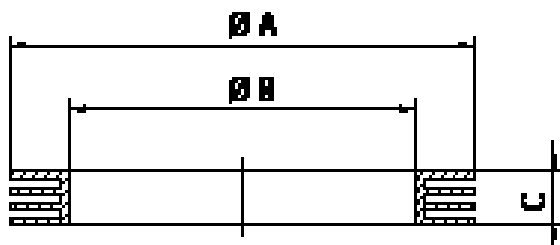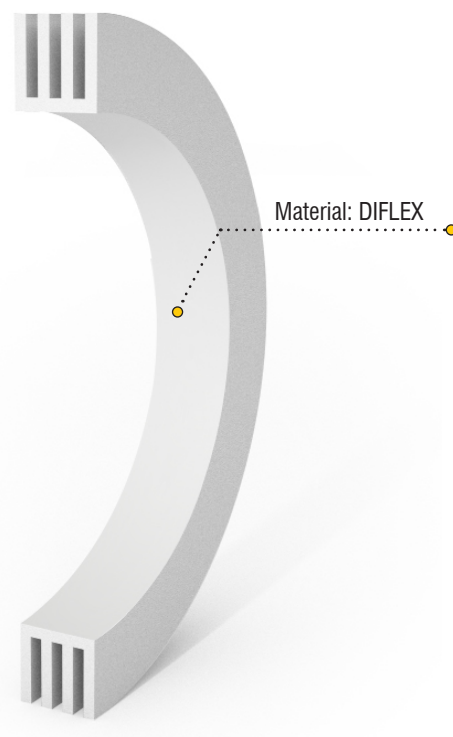

Gaskets dimensions

DN	Ø A	Ø B	C
15 - 1/2"	26	17	3,96
20 - 3/4"	35	22	5,53
25 - 1"	40	27	6,35
32 - 1 1/4"	49	34	6,35
40 - 1 1/2"	55	41	6,35
50 - 2"	66	51	6,35
65 - 2 1/2"	79	60	6,35
80 - 3"	94	76	6,35
100 - 4"	123	102	6,35

Service gaskets for fittings type:

