




Curve a 30° rivestite in PTFE

- DN 15 - DN 600, PN 10
- Versione standard: flange fisse
- Corpo in acciaio al carbonio

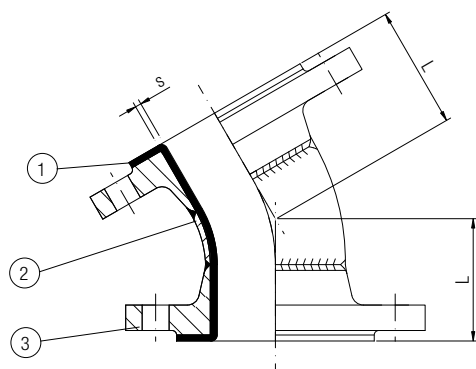

PTFE-lined elbows 30°

- DN 15 - DN 600, PN 10
- Standard version: fixed flanges
- Carbon steel body

Materiali/Materials

- | | |
|---|--------------------------|
| 1 | PTFE ASTM D-4894 or 4895 |
| 2 | St 37.0 - DIN 1629 |
| 3 | St 37.2 - DIN 17100 |

Fornibili a richiesta/Available on request

- Connessioni flangiate: 2 flange fisse o 2 flange libere
Flange connection: 2 fixed flanges or 2 loose flanges
- Resistenti al vuoto/*Vacuum resistance*
- PTFE antistatico/*Antistatic PTFE*
- Corpo in acc. inox/*Stainless steel body*
- Diametri superiori a richiesta/*Higher diameters on request*

DN	L mm	s mm	Peso ca. kg/Weight
15	50	3,0	1,5
20	57	3,0	2,0
25	61	3,0	2,7
32	70	4,0	3,9
40	73	4,0	4,6
50	70	4,0	5,8
65	75	4,0	7,2
80	85	4,0	9,1
100	96	4,5	11,6
125	106	4,5	15,3
150	118	5,0	19,6
200	145	5,0	30
250	168	5,0	43
300	190	6,5	57
350	210	6,5	74
400	235	6,5	102
450	205	6,5	125
500	275	6,5	162
600	325	4,5	212