




T uguali rivestiti in PTFE

- DIN 2848/2874
- DN 15 - DN 600, PN 10
- Versione standard: 3 flange fisse
- Corpo in acciaio al carbonio
- Per grossi diametri soluzione in 2 parti

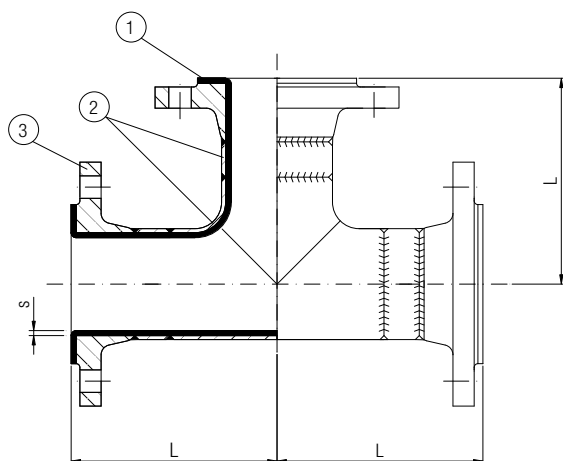

PTFE-lined equal tees

- DIN 2848/2874
- DN 15 - DN 600, PN 10
- Standard version: 3 fixed flanges
- Carbon steel body
- For big diameters solution in 2 parts

Materiali/Materials

- | | |
|----------|--------------------------|
| 1 | PTFE ASTM D-4894 or 4895 |
| 2 | St 37.0 - DIN 1629 |
| 3 | St 37.2 - DIN 17100 |

Fornibili a richiesta/Available on request

- Connessioni flangiate:
2 flange libere ed 1 flangia fissa o 3 flange libere
Flange connection:
2 loose flanges and 1 fixed flange or 3 loose flanges
- Resistenza al vuoto/*Vacuum resistance*
- PTFE antistatico/*Antistatic PTFE*
- Corpo in acc. INOX/*Stainless steel body*
- Diametri superiori a richiesta/*Higher diameters on request*

DN	L mm	s mm	Peso ca. kg/Weight
15	80	3	2,5
20	95	3,5	3,2
25	110	3,5	5,5
32	130	4,5	8
40	150	4,5	9,5
50	120	5	11,5
65	140	5	14,5
80	165	5	19,5
100	205	5	24
125	245	5,5	34
150	285	6	45
200	365	10	72
250	450	6,5	165
300	525	13	160
350	600	6,5	312
400	680	6,5	375
450	680	6,5	400
500	500	6,5	420
600	500	4,5	580