


## Croci uguali rivestite in PTFE

- ASME/ANSI B16.5 Classe 150
- DN 1/2" - DN 24"
- Versione standard: 4 flange fisse
- Corpo in acciaio al carbonio
- Per grossi diametri soluzione in 3 parti

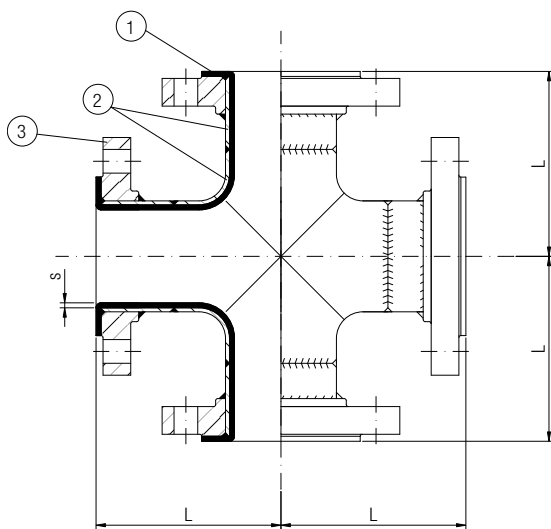

## PTFE-lined equal crosses

- ASME/ANSI B16.5 Class 150
- DN 1/2" - DN 24"
- Standard version: 4 fixed flanges
- Carbon steel body
- For big diameters solution in 3 parts

### Materiali/Materials

- |   |                          |
|---|--------------------------|
| 1 | PTFE ASTM D-4894 or 4895 |
| 2 | St 37.0 - DIN 1629       |
| 3 | ASTM A 105               |

### Fornibili a richiesta/Available on request

- Connessioni flangiate:  
1 flangia fissa e 3 flange libere o 4 flange libere  
*Flange connection:*  
1 fixed flange and 3 loose flanges or 4 loose flanges
- Flange ANSI B16.5 Classe 300/ANSI B16.5 Class 300 flanges
- Resistenza al vuoto/Vacuum resistance
- PTFE antistatico/Antistatic PTFE
- Corpo in acc. INOX/Stainless steel body
- Diametri superiori a richiesta/Higher diameters on request
- Croci ridotte/Reducing crosses

DN	L mm	s ± 10% mm	Peso ca. kg/Weight
1/2"	65	4,0	3,2
3/4"	75	4,5	4,0
1"	89	4,5	5,0
1 1/4"	95	5,5	6,5
1 1/2"	102	4,0	8,5
2"	114	4,75	13,0
2 1/2"	127	4,5	17,5
3"	140	5,8	28
4"	165	5,5	47
5"	190	5,0	73
6"	203	6,0	96
8"	229	6,0	125
10"	280	6,5	195
12"	305	6,5	280
14"	356	6,5	380
16"	381	6,5	480
18"	419	6,5	525
20"	457	6,5	550
24"	500	4,5	730