




Distanziali rivestiti in PTFE Tipo G

- ASME/ANSI B16.5 Classe 150
- DN 1/2" - DN 24"
- Corpo in acciaio al carbonio

PTFE-lined spacers Type G

- ASME/ANSI B16.5 Class 150
- DN 1/2" - DN 24"
- Carbon steel body

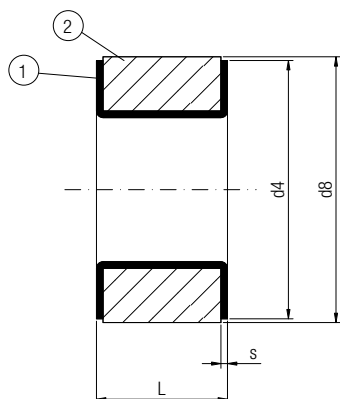

Materiali/Materials

- | | |
|---|--------------------------|
| 1 | PTFE ASTM D-4894 or 4895 |
| 2 | St 37.2 - DIN 17100 |

Fornibili a richiesta/Available on request

- Resistenti al vuoto/*Vacuum resistance*
- PTFE antistatico/*Antistatic PTFE*
- Corpo in acc. inox/*Stainless steel body*
- Diametri superiori a richiesta/*Higher diameters on request*

DN	L min. mm	L max. mm	s mm	d4 mm	d8 mm	Peso ca. kg/Weight
1/2"	30	60	2,5	35	44	0,9
3/4"	30	60	3	43	53	1,2
1"	30	60	3	51	63	1,8
1 1/4"	30	60	3	64	72	2,1
1 1/2"	30	60	3	73	82	2,6
2"	30	60	3	92	100	3,7
2 1/2"	30	70	4	105	120	4,7
3"	30	70	4	127	133	5,3
4"	30	80	4,5	158	170	9,5
5"	30	80	4,5	186	193	11
6"	30	80	5	216	218	14
8"	30	80	6,25	270	276	18
10"	30	80	6,75	324	336	29
12"	30	90	8	381	406	30
14"	30	90	9	412	447	50
16"	30	90	10	470	510	60
18"	30	100	7,5	534	545	71
20"	30	100	-	585	602	75
24"	30	120	-	692	714	113