




Flange cieche rivestite in PTFE

- ASME/ANSI B16.5 Class 150
- DN 1/2" - DN 24"
- Corpo in acciaio al carbonio

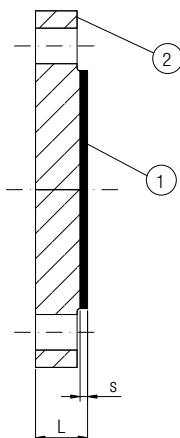

PTFE-lined blind flanges

- ASME/ANSI B16.5 Class 150
- DN 1/2" - DN 24"
- Carbon steel body

Materiali/Materials

- | | |
|---|---------------------|
| 1 | PTFE ASTM D-4894 |
| 2 | St 37.2 - DIN 17100 |

Fornibili a richiesta/Available on request

- ANSI B16.5 - Classe 300/ANSI B16.5 - Class 300
- Resistenti al vuoto/Vacuum resistance
- PTFE antistatico/Antistatic PTFE
- Corpo in acc. inox/Stainless steel body
- Diametri superiori a richiesta/Higher diameters on request

DN	L mm	s ± 10% mm	Peso ca. kg/Weight
1/2"	12,0	2,5	0,8
3/4"	12,7	3,0	0,9
1"	14,3	3,0	1,2
1 1/4"	15,9	3,0	1,8
1 1/2"	17,5	3,0	2,1
2"	19,0	3,0	3,0
2 1/2"	22,4	3,0	4,0
3"	23,9	3,5	5,0
4"	23,9	4,5	6,0
5"	23,9	4,5	9,1
6"	25,4	5,0	11,8
8"	28,5	5,0	18
10"	30,3	5,0	26
12"	31,8	5,0	35
14"	35,1	5,0	45
16"	36,6	6,0	60
18"	39,6	6,0	70
20"	43,0	6,0	85
24"	47,8	6,0	150