




### Riduzioni concentriche rivestite in PTFE

- ASME/ANSI B16.5 Classe 150
- DN 3/4" - DN 24"
- Versione standard: 2 flange fisse
- Corpo in acciaio al carbonio

### PTFE-lined concentric reducers

- ASME/ANSI B16.5 Class 150
- DN 3/4" - DN 24"
- Standard version: 2 fixed flanges
- Carbon steel body

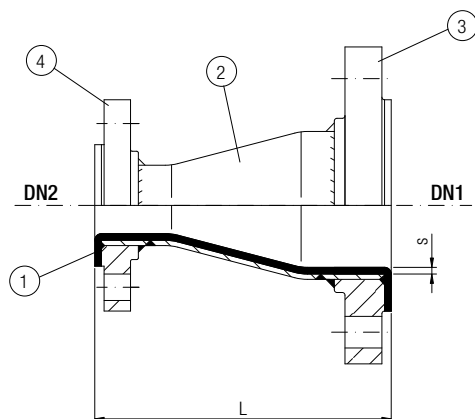

#### Materiali/Materials

- 1** PTFE ASTM D-4894 or 4895
- 2.1** ASTM A 234 Gr. WPB
- 2.2** St 37.0 - DIN 1629
- 3** ASTM A 105
- 4** ASTM A 105

#### Fornibili a richiesta/Available on request

- Connessioni flangiata: 1 flangia fissa e 1 flangia libera (DN1)  
*Flange connection: 1 fixed flange and 1 loose flanges (DN1)*
- Flange ANSI B16.5 - Classe 300/ANSI B16.5 - Class 300 flanges
- Resistenti al vuoto/*Vacuum resistance*
- PTFE antistatico/*Antistatic PTFE*
- Corpo in acc. INOX/*Stainless steel body*
- Diametri superiori a richiesta/*Higher diameters on request*

DN1	DN2	L mm	s ± 10% mm	Peso ca. kg/Weight
3/4"	1/2"	114	2	2,1
1"	1/2"	114	3	2,4
	3/4"			2,3
1 1/4"	3/4"	114	3	2,8
	1"			3,0
1 1/2"	3/4"	114	3	3,1
	1"			3,3
	1 1/4"			3,8
2"	1"	127	4/3	4,1
	1 1/4"			4,3
	1 1/2"			4,8
2 1/2"	1"	140	4/3	5,8
	1 1/4"			6,1
	1 1/2"		4	6,4
	2"		4	7,0
3"	1"	152	4/3	6,7
	1 1/4"			6,5
	1 1/2"		4/3	6,3
	2"		4	6,9



**Riduzioni concentriche rivestite in PTFE**

- ASME/ANSI B16.5 Classe 150

**PTFE-lined concentric reducers**

- ASME/ANSI B16.5 Class 150

DN1	DN2	L mm	s ± 10% mm	Peso ca. kg/Weight
3"	2 1/2"	152	4	7,5
4"	1"	178	4,5/3	10,2
	1 1/4"		4,5/3	9,6
	1 1/2"		4,5/3	9,4
	2"		4,5/4	9,9
	2 1/2"		4,5	10,6
	3"		4,5	12,3
5"	2"	203	4,5/4	10,6
	2 1/2"		4,5/4	11,0
	3"		4,5/4	12,8
	4"		4,5	15,0
6"	1"	229	5/3	19,0
	2"		5/3	20,0
	2 1/2"		5/4	18,0
	3"		5/4	17,4
	4"		5/4,5	18,3
	5"		5	20,1
8"	4"	279	6/4,5	22,1
	5"		6/4,5	23,8
	6"		6/5	25,2
10"	4"	305	6,5/4,5	33,1
	6"		6,5/5	37,8
	8"		6,5	44,8
12"	6"	356	6,5	46,0
	8"			48,0
	10"			52,6
14"	8"	406	6,5	69,0
	10"			73,6
	12"			80,0
16"	10"	457	6,5	98,0
	12"			105
	14"			115
18"	12"	483	6,5	135
	14"			148
	16"			157
20"	12"	508	6,5	185
	14"			198
	16"			210
	18"			218
24"	16"	610	4,5	272
	18"			282
	20"			291