




T ridotti rivestiti in PTFE

- ASME/ANSI B16.5 Classe 150
- DN 3/4" - DN 16"
- Versione standard: 3 flange fisse
- Corpo in acciaio al carbonio
- Per grossi diametri soluzione in 2 parti

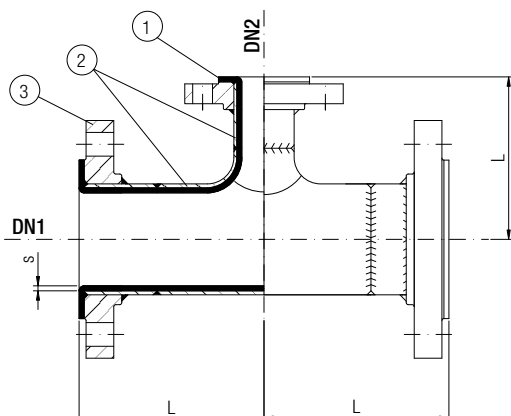

PTFE-lined reducing tees

- ASME/ANSI B16.5 Class 150
- DN 3/4" - DN 16"
- Standard version: 3 fixed flanges
- Carbon steel body
- For big diameters solution in 2 parts

Materiali/Materials

- | | |
|---|--------------------------|
| 1 | PTFE ASTM D-4894 or 4895 |
| 2 | St 37.0 - DIN 1629 |
| 3 | ASTM A 105 |

Fornibili a richiesta/Available on request

- Connessioni flangiate:
2 flange libere ed 1 flangia fissa o 3 flange libere
Flange connection:
2 loose flanges and 1 fixed flange or 3 loose flanges
- Flange ANSI B16.5 Classe 300/ANSI B 16.5
Class 300 flanges
- Resistenza al vuoto/*Vacuum resistance*
- PTFE antistatico/*Antistatic PTFE*
- Corpo in acc. INOX/*Stainless steel body*
- Diametri superiori a richiesta/*Higher diameters on request*

| DN1 | DN2 | L mm | s mm | Peso ca. kg/Weight |
|--------|--------|------|------|--------------------|
| 3/4" | 1/2" | 75 | 4,0 | 3,1 |
| 1" | 1/2" | 89 | 4,0 | 3,7 |
| | 3/4" | | | 3,9 |
| 1 1/4" | 3/4" | 95 | 4,0 | 4,4 |
| | 1" | | | 5,2 |
| 1 1/2" | 1/2" | 102 | 4,0 | 5,3 |
| | 3/4" | | | 5,5 |
| | 1" | | | 5,7 |
| | 1 1/4" | | | 6,0 |
| 2" | 1/2" | 114 | 4,0 | 8,8 |
| | 1" | | | 9,3 |
| | 1 1/4" | | | 9,5 |
| | 1 1/2" | | | 9,8 |
| 2 1/2" | 1" | 127 | 4,0 | 14,0 |
| | 1 1/4" | | | 14,0 |
| | 1 1/2" | | | 14,7 |
| | 2" | | | 15,5 |
| 3" | 1" | 140 | 4,0 | 19,7 |
| | 1 1/2" | | | 20,4 |



T ridotti rivestiti in PTFE

- ASME/ANSI B16.5 Classe 150

PTFE-lined reducing tees

- ASME/ANSI B16.5 Class 150

| DN1 | DN2 | L mm | S | Peso ca. kg/Weight |
|-----|--------|------|-----|--------------------|
| 3" | 2" | 140 | 4,0 | 20,9 |
| | 2 1/2" | | | 21,8 |
| 4" | 1" | 165 | 4,5 | 31,4 |
| | 1 1/2" | | | 33,3 |
| | 2" | | | 34,1 |
| | 2 1/2" | | | 35,0 |
| | 3" | | | 36,0 |
| 5" | 2 1/2" | 190 | 5,0 | 49,0 |
| | 3" | | | 52,0 |
| | 4" | | | 55,0 |
| 6" | 3" | 203 | 6,0 | 56,2 |
| | 4" | | | 77,0 |
| | 5" | | | 80,0 |
| 8" | 4" | 229 | 6,0 | 83,0 |
| | 5" | | | 125 |
| | 6" | | | 130 |
| 10" | 6" | 280 | 6,5 | 156 |
| | 8" | | | 161 |
| 12" | 6" | 305 | 6,5 | 165 |
| | 8" | | | 218 |
| | 10" | | | 222 |
| 14" | 6" | 356 | 6,5 | 205 |
| | 8" | | | 294 |
| | 10" | | | 300 |
| | 12" | | | 308 |
| 16" | 8" | 381 | 6,5 | 292 |
| | 10" | | | 356 |
| | 12" | | | 362 |
| | 14" | | | 370 |