

Valvole a 2 vie in esecuzione ANSI/ASME Classe 150 LBS

- Estremità flangiate
- Manovra a leva manuale o con riduttore manuale incluso
- Attuatori disponibili su richiesta per tutti i modelli

Dimensioni conformi a ANSI B16.5 e B16.10

E = spazio richiesto per il rifacimento della boccola misurato come distanza dall'asse

EG = fornite con riduttore manuale incluso

N = numero fori

Due (2) fori sulla parte superiore delle flange sono dotati di filettatura UNC. Vedi colonna fori UNC.

¹ Sei (6) fori sulla parte superiore

* Le valvole 2 1/2" sono costruite in fusione da 3", ma con flange da 2 1/2"

Sleeved Plug Valves - 2-way ANSI/ASME Class 150 LBS

- Flanged Ends
- Wrench Operated
- Actuators Optional on All Sizes

Dimensions to ANSI B16.5 & B16.10

E = Clearance required for resleeving measured from center line


EG = Enclosed gear operated

N = Number of holes

Two (2) top holes in flanges are tapped with UNC threads. See Hole-UNC column

¹ Six (6) top holes

* 2 1/2" valves are made from 3" casting, but flanges are machined to 2 1/2" dimensions

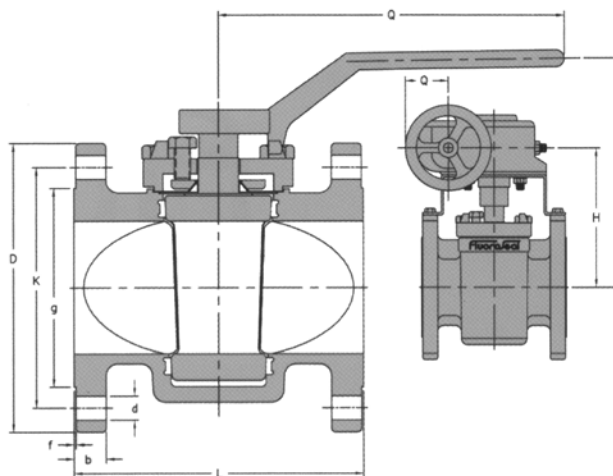

Dim. Size	L		H		D		K		g		b		f		d		Q		Peso/Weight		E		N #	Foro/Hole UNC
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	kg	lbs	in	mm				
1/2"	4.25	108.00	3.38	86.00	3.50	88.90	2.38	60.5	1.38	35.0	0.37	9.50	0.06	1.52	0.63	16.0	8.00	203.00	2.3	5.0	6.38	162.10	4	-
3/4"	4.63	117.50	3.38	86.00	3.88	98.50	2.75	69.9	1.68	42.9	0.37	9.50	0.06	1.52	0.63	16.0	8.00	203.00	2.7	6.0	6.38	162.10	4	-
1"	5.00	127.00	4.50	114.00	4.25	108.00	3.13	79.5	2.00	50.8	0.44	11.20	0.06	1.52	0.63	16.0	9.00	229.00	3.6	8.0	8.50	215.90	4	-
1 1/2"	6.50	165.10	5.31	135.00	5.00	127.00	3.88	98.6	2.88	73.2	0.56	14.20	0.06	1.52	0.63	16.0	14.25	362.00	6.4	14.0	10.38	263.70	4	-
2"	7.00	177.80	6.25	159.00	6.00	152.40	4.75	120.7	3.63	92.0	0.63	16.00	0.06	1.52	0.75	19.0	16.50	419.00	10.5	23.0	12.25	311.20	4	-
*2 1/2"	8.00	203.20	6.56	167.00	7.50	190.50	5.50	139.7	4.13	104.6	0.75	19.00	0.06	1.52	0.75	19.0	16.50	419.00	16.4	36.0	12.63	320.80	4	-
3"	8.00	203.20	6.56	167.00	7.50	190.50	6.00	152.4	5.00	127.0	0.75	19.00	0.06	1.52	0.75	19.0	16.50	419.00	16.4	36.0	13.63	346.20	4	-
4"	9.00	228.60	7.63	194.00	9.00	228.60	7.50	190.5	6.19	157.2	0.94	23.90	0.06	1.52	0.75	19.0	23.63	600.00	26.8	59.0	16.25	412.80	8	-
4" EG	9.00	228.60	9.10	231.00	9.00	228.60	7.50	190.5	6.19	157.2	0.94	23.90	0.06	1.52	0.75	19.0	7.25	184.00	35.9	79.0	17.63	447.80	8	-
6" EG	10.50	266.70	10.80	274.00	11.00	279.40	9.50	241.3	8.50	215.9	1.00	25.40	0.06	1.52	0.88	22.4	7.25	184.00	55.5	122.0	21.75	552.50	8	-
8" EG	11.50	292.10	12.75	324.00	13.50	342.90	11.75	298.5	10.63	269.8	1.13	28.70	0.06	1.52	0.88	22.4	9.75	248.00	100.0	220.0	26.63	676.40	8	3/4" - 10
10" EG	13.00	330.20	14.68	373.00	16.00	406.40	14.25	362.0	12.75	323.9	1.19	30.20	0.06	1.52	1.00	25.4	9.75	248.00	150.0	330.0	31.25	793.80	12	7/8" - 9
12" EG	14.00	355.60	16.40	417.00	19.00	482.60	17.00	431.8	15.00	381.0	1.25	31.80	0.06	1.52	1.00	25.4	13.75	349.25	198.6	437.0	33.75	857.30	12	7/8" - 9
14" EG	15.00	381.00	17.40	442.00	21.00	533.40	18.75	476.3	16.25	412.8	1.38	35.10	0.06	1.52	1.12	28.4	13.75	349.25	295.0	650.0	34.75	882.70	12	1" - 8
16" EG	30.00	762.00	21.29	540.72	23.00	584.20	21.25	539.75	18.50	469.90	1.38	35.05	0.06	1.52	1.13	28.58	9.85	250.19	-	-	46.00	1168.40	16	1" - 8
18" EG	34.00	863.60	21.29	540.84	25.00	635.00	22.75	577.85	21.00	533.40	1.50	38.10	0.06	1.52	1.25	31.75	9.85	250.19	-	-	46.00	1168.40	16	1 1/8" - 8
20" EG	36.00	914.40	27.43	696.70	27.00	685.80	25.00	635.00	23.00	584.20	1.62	41.15	0.06	1.52	1.25	31.75	9.85	250.19	-	-	57.63	1463.80	20	1 1/8" - 81
24" EG	42.00	1066.8	27.43	696.70	31.00	787.40	29.50	749.30	27.25	692.15	1.81	45.97	0.06	1.52	1.38	34.93	9.85	250.19	-	-	57.63	1463.80	20	1 1/4" - 8