

Valvola a 3 vie in esecuzione ASME/ANSI Classe 300 LBS

- Estremità flangiate
- Manovra a leva manuale o con riduttore manuale incluso
- Attuatori disponibili su richiesta per tutti i modelli

Dimensioni conformi a ANSI B16.5 e B16.10

E = spazio richiesto per il rifacimento della boccola misurato come distanza dall'asse

EG = fornite con riduttore manuale incluso

N = numero fori

Due (2) fori sulla parte superiore delle flange sono dotati di filettatura UNC. Vedi colonna fori UNC.

* Le valvole da 2 1/2" sono costruite in fusione da 3", ma le flange sono sottoposte a lavorazione fino alle dimensioni 2 1/2"

Sleeved Plug Valves - Multiport ASME/ANSI Class 300 LBS

- Flanged Ends
- Wrench Operated
- Actuators Optional on All Sizes

Dimensions to ANSI B16.5 & B16.10


E = Clearance required for resleeving measured from center line

EG = Enclosed gear operated

N = Number of holes

Two (2) top holes in flanges are tapped with UNC threads. See Hole-UNC column

* 2 1/2" valves are made from 3" casting, but flanges are machined to 2 1/2" dimensions

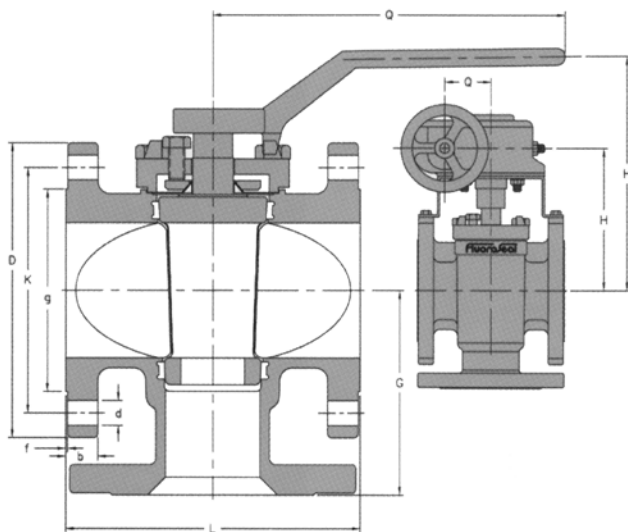

Dim. Size	L		H		D		K		g		b		f		d		Q		G		Peso Weight		E		N	Foro Hole UNC	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	kg	lbs	in	mm	#		
1/2"	5.50	139.70	3.38	86.00	3.75	95.30	2.63	66.80	1.38	35.0	0.56	14.20	0.06	1.6	0.63	16.0	8.00	203.00	2.88	73.20	3.2	7.0	6.38	162.10	4	-	
3/4"	6.00	152.40	3.38	86.00	4.63	117.60	3.25	82.60	1.69	42.7	0.63	16.00	0.06	1.6	0.75	19.00	8.00	203.00	3.00	76.20	4.1	9.0	6.38	162.10	4	-	
1"	6.50	165.10	4.50	114.00	4.88	124.00	3.50	88.90	2.00	50.8	0.69	17.50	0.06	1.6	0.75	19.00	9.00	229.00	3.75	95.30	5.5	12.0	8.50	215.90	4	-	
1 1/2"	7.50	190.50	5.31	135.00	6.13	155.70	4.50	114.30	2.88	73.2	0.81	20.60	0.06	1.6	0.88	22.40	14.25	362.00	4.38	111.30	9.5	21.0	10.38	263.70	4	-	
2"	8.50	215.90	6.25	159.00	6.50	165.10	5.00	127.00	3.63	92.0	0.88	22.40	0.06	1.6	0.75	19.00	16.50	419.00	4.75	120.70	13.2	29.0	12.25	311.20	8	-	
*2 1/2"	11.13	282.70	6.56	167.00	8.25	209.6	5.88	149.40	4.13	104.6	1.13	28.70	0.06	1.6	0.88	22.40	16.50	419.00	5.56	141.20	21.8	48.0	12.63	320.80	8	-	
3"	11.13	282.70	6.56	167.00	8.25	209.6	6.63	168.40	5.00	127.0	1.13	28.70	0.06	1.6	0.88	22.40	16.50	419.00	5.56	141.20	21.8	48.0	13.63	346.20	8	-	
4"	12.00	304.80	7.63	194.00	10.00	254.00	7.88	200.20	6.19	157.2	1.25	31.80	0.06	1.6	0.88	22.40	23.63	600.00	6.75	171.50	42.0	92.0	16.25	412.80	8	-	
4" EG	12.00	304.80	9.10	231.00	10.00	254.00	7.88	200.20	6.19	157.2	1.25	31.80	0.06	1.6	0.88	22.40	7.25	184.00	6.75	171.50	54.0	119.0	17.63	447.80	8	-	
6" EG	15.88	403.40	10.80	274.00	12.50	317.50	10.63	270.00	8.50	215.9	1.44	36.6	0.06	1.6	0.88	22.40	7.25	184.00	8.50	215.90	91.4	201.0	21.75	552.50	12	-	
8" EG	16.50	419.10	12.75	324.00	15.00	381.00	13.00	330.20	10.63	269.8	1.63	41.40	0.06	1.6	1.00	25.40	9.75	248.00	10.00	254.00	141.4	311.0	26.63	676.40	12	7/8" - 7	
10" EG	18.00	457.20	14.68	373.00	17.50	444.50	15.25	387.40	12.75	323.9	1.88	47.80	0.06	1.6	1.13	28.70	9.75	248.00	-	-	210.9	464.0	31.25	793.80	16	1" - 8	
12" EG	19.75	501.70	16.40	417.00	20.50	520.70	17.75	450.90	15.00	381.00	2.00	50.80	0.06	1.6	1.25	31.80	13.75	349.25	-	-	279.0	614.0	33.75	857.30	16	1 1/8" - 7	
14" EG	30.00	762.00	17.40	442.00	23.00	584.20	20.25	514.40	16.25	412.8	2.12	53.80	0.06	1.6	1.25	31.80	13.75	349.25	-	-	363.0	800.0	34.75	882.70	20	-	