
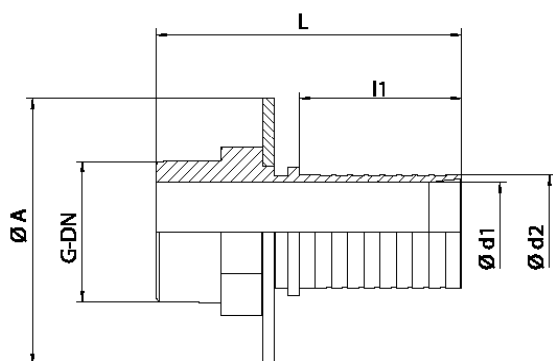


□ AISI 316L MALE BSP/GAS THREADED FITTING WITH PROTECTIVE GUARD DIFLON D2

The fitting is used in chemical, pharmaceutical and food industries to connect hoses quickly to equipments and plants.


It is suitable for high pressure uses.

Standard construction material is AISI 316L.
BSP/GAS thread.

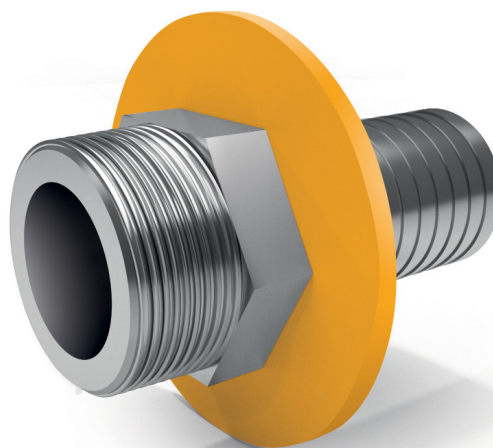

RECOMMENDED GASKET

DIFLEX BSP/GAS gasket, resistant to all acids and chemicals, pharmaceuticals and food products with temperatures from -170 °C to +270 °C and pressures up to 50 bar.



DN	L	l1	G	Ø d1	Ø d2	Ø A
15 - 1/2"	60	30	1/2"	9	13	70
20 - 3/4"	75	31	3/4"	15	19,2	70
25 - 1"	80	34	1"	20	25,7	80
32 - 1 1/4"	85	40	1 1/4"	28	32,4	90
40 - 1 1/2"	90	51	1 1/2"	33	38,5	100
50 - 2"	100	62	2"	46	51	110
65 - 2 1/2"	120	68	2 1/2"	59	64	130
80 - 3"	135	81	3"	71	75	150
100 - 4"	150	92	4"	96	101	170

GASKET BSP/GAS

DN	Ø A	Ø B	C
15 - 1/2"	20	10	3
20 - 3/4"	26	16	3
25 - 1"	32	21	3
32 - 1 1/4"	40	29	3
40 - 1 1/2"	46	34	3
50 - 2"	59	47	3
65 - 2 1/2"	73	60	3
80 - 3"	86	72	3
100 - 4"	112	97	3