



DIFLEX FLATE GASKETS FOR EN 1092-01 AND ANSI

Application examples

- flat gaskets for flanges of any type, with or without grooves
- profiled flat gaskets, with chamber, for rapid assembly etc.



Applications

Acids, Strong alkali, Solvents, Catalyzers, Aromatics, etc. Food, Pharmaceutical, Chemical, Petrochemical, etc.


- Operating temperature: -150° $+260^{\circ}$ C
- Working pressure at room temperature: 80 bar
- P_XT: 12.000 (bar x C^o) - pH: 0 ÷ 14

Purity of product for Diflex gaskets

DIFLEX can be used, without contra-indications, in the production of basic commodities

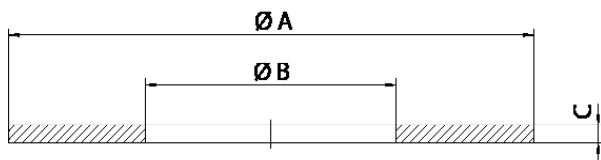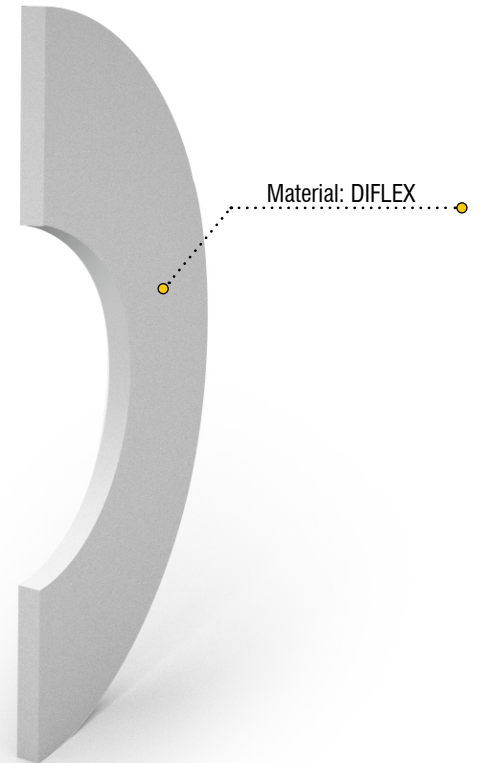

Service gasket for fittings type:

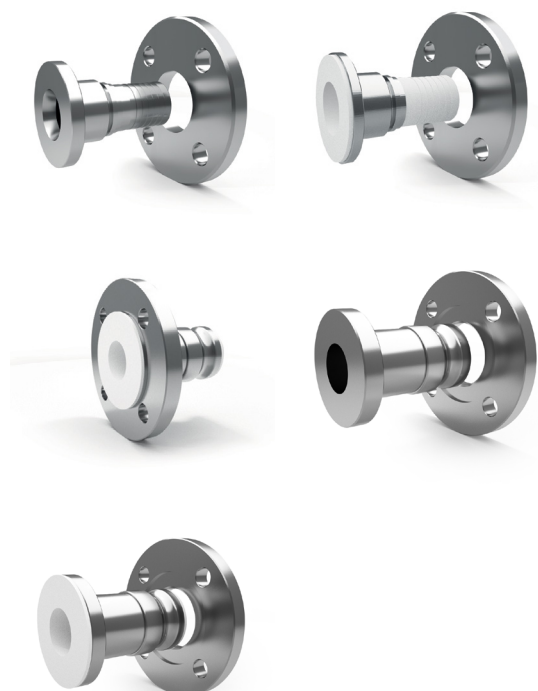

Gaskets dimensions

DN	Ø A DIN	Ø A ANSI	Ø B	C
15 - 1/2"	45	35	15	3,96
20 - 3/4"	58	43	20	5,53
25 - 1"	68	51	25	6,35
32 - 1 1/4"	78	64	32	6,35
40 - 1 1/2"	88	73	40	6,35
50 - 2"	102	92	50	6,35
65 - 2 1/2"	122	105	65	6,35
80 - 3"	138	127	80	6,35
100 - 4"	158	158	100	6,35