



## GASKETS EPDM-NBR FOR CAM & GROOVE FITTINGS

### Application examples EPDM

In specific design gaskets EPDM for CAM & GROVE fittings

### Applications

Air, Water, Steam, Oxygen, Oxidation by ozone, brake hydraulic oils, detergents etc.

- Operating temperature: -40° C +120° C



### Application examples NBR

In specific design gaskets NBR for CAM & GROVE fittings

### Applications

Excellent mechanical strenght, wear, good resistance to aliphatic hydrocarbons, oils and fats mineral, Plumbers Liquids of HFC group, water, diluite acids at room temperature, etc.

- Operating temperature: -30° C +110° C

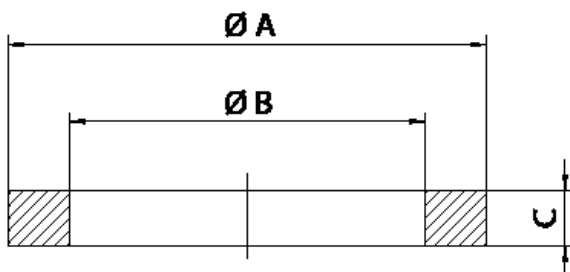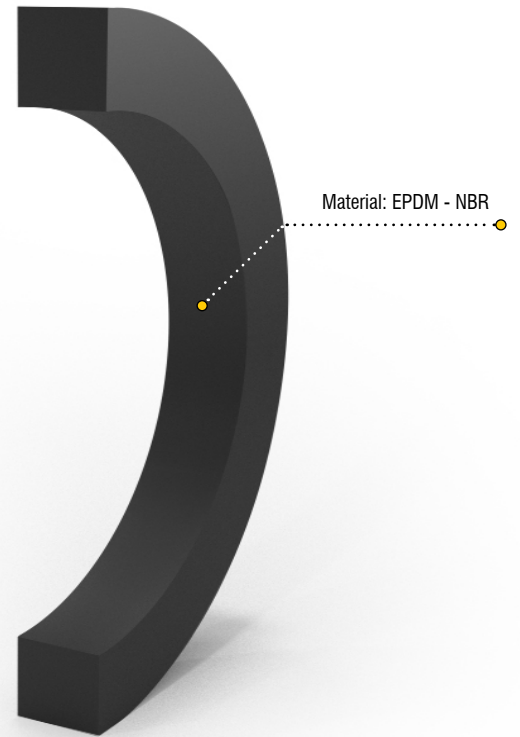

### Gaskets dimensions

DN	Ø A	Ø B	C
15 - 1/2"	26	17	3,96
20 - 3/4"	35	22	5,53
25 - 1"	40	27	6,35
32 - 1 1/4"	49	34	6,35
40 - 1 1/2"	55	41	6,35
50 - 2"	66	51	6,35
65 - 2 1/2"	79	60	6,35
80 - 3"	94	76	6,35
100 - 4"	123	102	6,35
100 - 4"	123	102	6,35

### Service gaskets for fittings type:

