



index

previous view

H1-29
data sheet

PACKFLUID

H1

□ PTFE BRAID PACKING - TYPE PF165/G

Product's category

Non sintered extruded PTFE + GRAPHITE


Characteristics

In addition, special lubricants are added that make it soft and easily adaptable to each seal seat, this gasket is chemically inert and withstands the attack of all chemical products and solvents, except for alkaline materials. Does not harden in the limit of 260 ° C, avoiding the scratches of the tree; it is unassailable by corrosive agents.

Applications

Rotary pumps, alternative pumps, agitators and mixers.

Acids, alkalis, gases, solvents, Steam, centrifugal pumps, plunger pumps, mixers, agitators, Valves (bar), expansion joints and vacuum pumps.

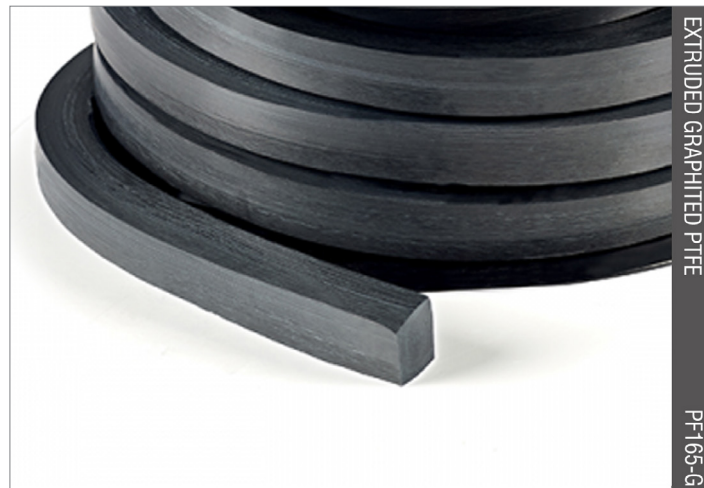

Theoretical weights

Section (mm)	Weight (kg)
4 x 4	1,5
5 x 5	1,5
6 x 6	2,5
8 x 8	2,5
10 x 10	2,5
12 x 12	2,5
14 x 14	5

Section (mm)	Weight (kg)
15 x 15	5
16 x 16	5
18 x 18	5
20 x 20	5
25 x 25	5