




Flange cieche rivestite in PTFE

- DIN 2848/2874
- DN 15 - DN 600, PN 10
- Corpo in acciaio al carbonio

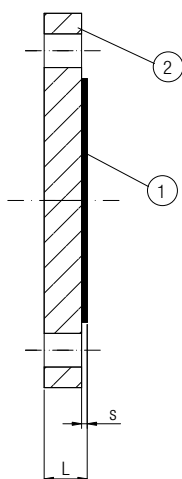

PTFE-lined blind flanges

- DIN 2848/2874
- DN 15 - DN 600, PN 10
- Carbon steel body

Materiali/Materials

- | | |
|---|---------------------|
| 1 | PTFE ASTM D-4894 |
| 2 | St 37.2 - DIN 17100 |

Fornibili a richiesta/Available on request

- Resistenti al vuoto/*Vacuum resistance*
- PTFE antistatico/*Antistatic PTFE*
- Corpo in acc. inox/*Stainless steel body*
- Diametri superiori a richiesta/*Higher diameters on request*

| DN | L mm | s ± 10% mm | Peso ca. kg/Weight |
|-----|------|------------|--------------------|
| 15 | 17 | 2,5 | 0,8 |
| 20 | 17 | 3,0 | 0,9 |
| 25 | 20 | 3,0 | 1,2 |
| 32 | 20 | 3,0 | 1,8 |
| 40 | 20 | 3,0 | 2,1 |
| 50 | 22 | 3,0 | 3,0 |
| 65 | 22 | 3,0 | 4,0 |
| 80 | 24 | 3,5 | 5,0 |
| 100 | 24 | 4,5 | 6,0 |
| 125 | 27 | 4,5 | 9,1 |
| 150 | 27 | 5,0 | 11,8 |
| 200 | 29 | 5,0 | 18 |
| 250 | 31 | 5,0 | 26 |
| 300 | 31 | 5,0 | 35 |
| 350 | 31 | 5,0 | 45 |
| 400 | 32 | 6,0 | 60 |
| 450 | 32 | 6,0 | 70 |
| 500 | 34 | 6,0 | 85 |
| 600 | 36 | 6,0 | 150 |